Understanding Your Electric Bill with Solar Net Metering

Now that Your Solar Panels are Installed



10/17/2018


Meter #1 – Records electricity CMLP delivered to the customer that month


Meter #2* - Notice the meter # ending in 'N'; CMLP's smart meter (which can record backwards) shows excess electricity generated by solar panels, not used by the customer, and sold back to CMLP from the customer

Net usage billed = electricity CMLP delivers to the customer minus the solar electricity sent back to CMLP by the customer

*NOTE: CMLP's net meter doesn't interface with the solar array meter your solar installer provided; we don't know how much solar generation was produced and can't measure the total amount of electricity used. See pg 7 to learn how to calculate how much electricity you've generated and used.

How Solar Reduces Your Billed Electric Usage (kWh)

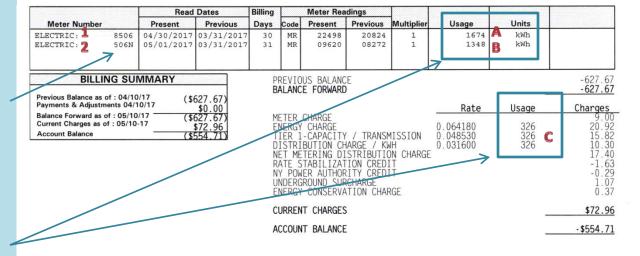




(Example #1)

Mail All Correspondence To: P.O. Box 1029, CONCORD, MA 01742-1029

Bill Type	Account Type	Bill Date	Due Date	Amount Due	Payment Type
REGULAR	RESIDENTIAL	05/10/2017	06/05/2017	(-554.71)	DO NOT PAY
MESSAGES:			•	•	•

How Solar Reduces Your Billed Electric Usage (kWh)

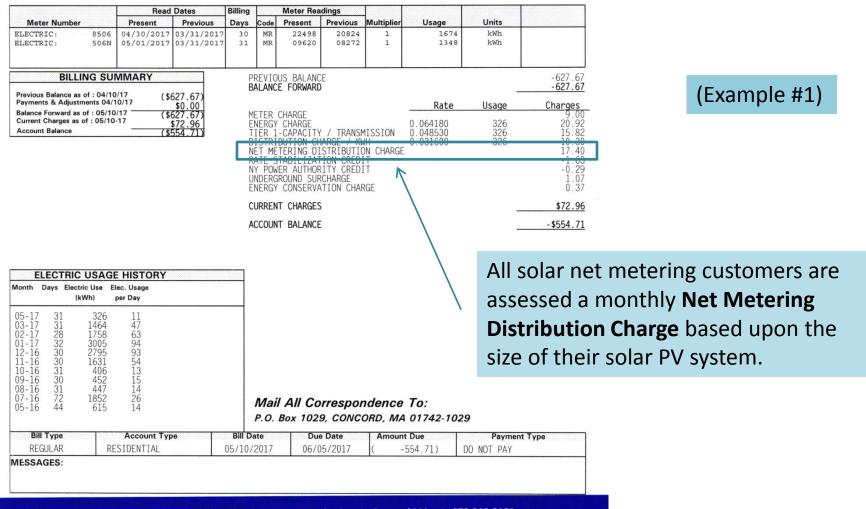

Solar Net Metering Credit

L	Read	Read Dates		Meter Readings		Meter Readings		Meter Readings				
Meter Number		Present Previous	Previous	Days	Code	Present	Previous	Multiplier	Usage	Units		
ELECTRIC: ELECTRIC:	8363 363N		03/31/2017 03/31/2017		MR MR	04674 03967	04017 02810	1	657 1157	kWh kWh		
BILL Previous Balance a		0/17	\$12.33	P	AYMEN	US BALANO T 04/24 E FORWARD	1/2017				12.33 -12.33 0.0 0	
Balance Forward a Current Charges as	s of : 05/10	/17	\$12.33) \$0.00 \$7.37	N	METED	CHADGE			Rate	Usage	Charges	
Total Amount Due	1		\$7.37	K	WH -	NET RESID	DENTIAL SA	ALES			-15.58	
					INDERG	ROUND SUF	ISTRIBUTIO RCHARGE ATION CHAF			K	13.80 0.11 0.04	
				C	URREN	T CHARGES	6			1	\$7.37	

TOTAL AMOUNT DUE

(Example #2)

Mail All Correspondence To: P.O. Box 1029, CONCORD, MA 01742-1029

Bill Type	Account Type	Bill Date	Due Date	Amount Due	Payment Type
REGULAR	RESIDENTIAL	05/10/2017	06/05/2017	7.37	PLEASE PAY BY DUE DATE
		-		•	

MESSAGES:

Net Metering Credit - This home generated & sold back to the grid more electricity than was needed from CMLP. The resulting negative usage, shown on the bill as 'Net Residential Sales' is their Solar Net Metering Credit.

The credit amount for energy generated that exceeds that purchased from CMLP is a variable amount as described in the Residential Net Metering with Banking rate.

You can find the variable monthly credit amount at: www.concordma.gov/536/Solar-Net-Metering-Credit.

See Example #1 for the Net Metering Distribution charge.



Home > Government > Departments > Municipal Light Plant > Electric Service > Rates > Solar Net Metering Credit



Solar Net Metering Credit

Home > Government > Departments > Municipal Light Plant > Electric Service > Rates > Solar Net Metering Credit

Solar Net Metering Credit

The net metering credit is based on the average Day Ahead Independent System Operator-New England (ISO-NE) price for all hours in the month prior to the current billing month between 9 a.m. - 4 p.m. The credit amount for energy generated that exceeds a customer's purchases from CMLP is a variable amount as described in the Residential Net Metering with Banking rate.

ISO-NE oversees the constant availability of electricity in New England by ensuring the day-to-day operation of New England's bulk power generation and transmission system, ensuring the fair administration of the region's wholesale electricity markets, and managing regional planning.

Solar Photovoltaic Rebate Programs

CMLP offers rebates for solar photovoltaic installations. Read more for information about our Solar Photovoltaic Rebate Program for your home or business.

Net credit per Kilowatt Hour	Month Kilowatt Hours sold to CMLP	Month customer's bill rendered
\$0.03115	April 2017	May 2017
\$0.03581	March 2017	April 2017
\$0.02942	February 2017	March 2017

Net Meterii	ng
Distributio	n
Charges	Fx. 2

All solar net meter customers

Metering Distribution Charge

are assessed a monthly Net

generating capacity of their

based on the installed

solar PV system

Installed Generati			
Equal or Greater Than	and Less Than	Charge / mo.	
2 kW (AC)	4 kW (AC)	\$3.60 / mo.	
4 kW (AC)	7 kW (AC)	\$6.60 / mo.	
7 kW (AC)	10 kW (AC)	\$10.20 / mo.	
10 kW (AC)	13 kW (AC)	\$13.80 / mo.	
13 kW (AC)	16 kW (AC)	\$17.40 / mo.	
16 kW (AC)	19 kW (AC)	\$21.00 / mo.	
19 kW (AC)	22 kW (AC)	\$24.60 / mo.	
22 kW (AC)	25 kW (AC)	\$28.20 / mo.	
25 kW (AC)	28 kW (AC)	\$31.80 / mo.	
28 kW (AC)	31 kW (AC)	\$35.40 / mo.	
31 kW (AC)	34 kW (AC)	\$39.00 / mo.	
34 kW (AC)	37 kW (AC)	\$42.60 / mo.	
37 kW (AC)	40 kW (AC)	\$46.20 / mo.	
40 kW (AC)	46 kW (AC)	\$53.40 / mo.	
46 kW (AC)	58 kW (AC)	\$67.80 / mo.	

82 kW (AC)

130 kW (AC)

167 kW (AC)

58 kW (AC)

82 kW (AC)

130 kW (AC)

\$96.60 / mo.

\$154.20 / mo.

\$198.60 / mo.


Find more information about CMLP's net metering rider rate and the net metering distribution charges at:

www.concordma.gov/Docume
ntCenter/Home/View/1205

How Much Electricity Did You Use?

To figure out how much electricity you used in a month (E):

- Take the electricity delivered from CMLP (A on the sample bill)
- 2. Subtract the electricity sold to CMLP (B on the sample bill, gross)
 - = Amount CMLP charges you each month (C)

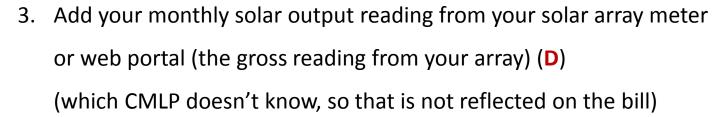

Example #1

1,674 kWh CMLP \rightarrow Home (A)

-1,348 kWh Home \rightarrow CMLP (B)

326 kWh (**C**)

+ Gross from Solar Meter (D)

Total kWh Used = Home Load (E)

Example #2

657 kWh CMLP \rightarrow Home (A)

-1,157 kWh Home \rightarrow CMLP (B)

- 500 kWh (C)

+ Gross from Solar Meter (D)

Total kWh Used = Home Load (E)



CMLP's Basic Residential Service Rate

To learn more about the Residential Service rate for Concord residents: www.concordma.gov/DocumentCenter/Home/View/1199

- 1. Both the Energy (7.4¢ / kWh) and Distribution (3.2¢ / kWh) charges are calculated based on kWh used.
- 2. Capacity and transmission charges are broken down into three tiers depending on monthly electricity usage:
 - a) First 600 kWh: 4.9¢ / kWh
 - b) Next 316 kWh: 6.3¢ / kWh
 - c) Any use above 916 kWh: 9.1¢ / kWh
- 3. Combined energy, distribution, and capacity and transmission charges broken down into three tiers depending on electricity usage are:
 - a) First 600 kWh: (7.4c + 3.2c + 4.9c) / kWh = 15.5c / kWh
 - b) Next 316 kWh: (7.4 + 3.2 + 6.3) / kWh = 16.9 / kWh
 - c) Any use above 916 kWh: (7.4c + 3.2c + 9.1c) / kWh = 19.7c / kWh



Home > Government > Departments > Municipal Light Plant > Energy Management: Renewable Energy & Efficiency > Your Home > Rebates for Your Home > Solar Panels



Lease/Buy/Choose an Installer

EPA video explaining RECs

How to Read Your Solar Net Metered Bill Home > Government > Departments > Municipal Light Plant > Energy Management: Renewable Energy & Efficiency > Your Home > Rebates for your Home > Solar Panels

Solar Panels

Steps to Installing Solar

Customers frequently ask us about the process for installing solar photovoltaic (PV) panels on their homes or businesses. For solar PV installations, CMLP offers rebates of \$625 per kW(AC) of installed capacity, capped at \$3,125.

Here are the various stages involved in the process. On average, the time from interconnection application submittal to CMLP before panels are installed to approval from CMLP to operate the PV system after panels are installed is 2 months.

- 1) Property owner decides on leasing or buying a system and finds a solar installer
- 2) Installer gathers all needed paperwork:
 - a) Residential Interconnection Application or Commercial Interconnection Application
 - b) CMLP Solar PV Rebate Application *

Questions?

For more information about CMLP's solar program or other questions, please contact:

Pamela Cady
Energy Specialist
CMLP
1175 Elm Street
Concord, MA 01742



ELECTRIC | BROADBAND | ENERGY MANAGEMENT

(978) 318-3149 pcady@concordma.gov

Steps to Installing Solar Panels on Your Property:

Property owner finds a solar installer to work with

[link to list of solar installers who've worked in town]



Installer gathers all needed paperwork

[link to list of required solar documents]



All solar paperwork bundled & sent to ENE

[ENE contact info here]



CMLP Engineer gives Approval to Install *

(occasionally a site visit is necessary)



CMLP Director gives
Approval to Install



ENE notifies property owner & installer of Approval




Panels Installed Step 6 on property

Town Electrical Inspector visits site to give approval



cMLP Electrician installs Step 8 send & receive meter



(Meter installed next to solar meter Property owner does not need to be on site Usually a brief power outage is required) (on site visit not usually needed)

ENE notifies property owner & installer of Approval



Property owner begins generating their own power!



Property owner receives one-time rebate check in the mail in ~ 6 weeks (if this is selected rather than rebate applied to bills)

- * <u>Approval to Install</u>: Please be aware that all PV systems should not be installed on the property until CMLP has given the final approval via the approval to install email. CMLP requires this step because:
- It financially protects the homeowner so they don't have to pay extra money to change, for instance, the location of the meter if it is not within the required distance to the utility disconnect
- CMLP will confirm that nearby cables and transformers on our electric grid will not be overloaded by the addition of the PV system
- CMLP will assure that our electric grid lines will remain balanced with the increase in electricity they will carry during sunlight hours

- ** <u>Approval to Operate</u>: Please be aware that all PV systems should not be switched on until CMLP has given the final approval via the approval to operate email. CMLP requires this step because:
- It is a potential operational safety hazard for our linesmen working on our electric grid if the PV system begins operating before we are aware of it
- If a PV system begins operating before we install the net meter, any power generated by the system with the old meter in place is automatically calculated as energy CMLP sent to the customer rather than vise-versa (because the old meter can only run in one direction)